

Speaker Circuit Instructions


The Kit:

Copper Foil Tape


Masking Tape

Neodymium Magnets (2)

Mini-Plug to Alligator Clip

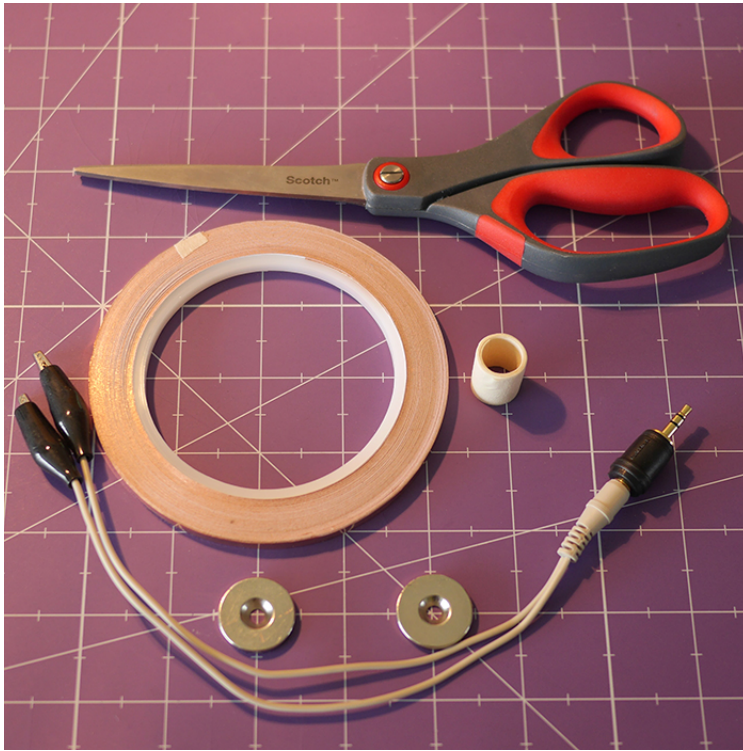


1. Create a Zine Fold Book

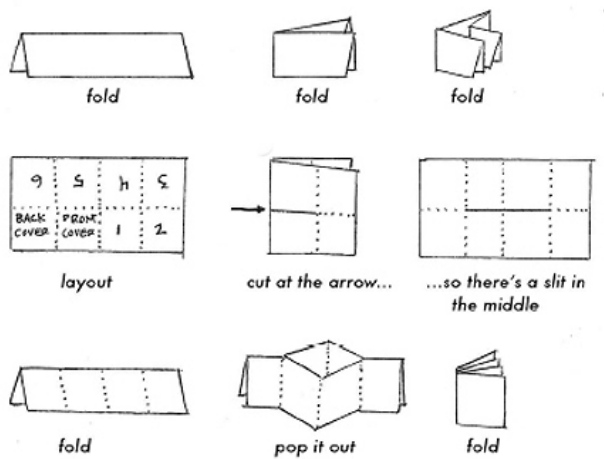


2. *Draw a Coil*

On one page of your book, draw a spiral pattern. This can be a square, circular, hexagonal, floral, or whatever pattern.

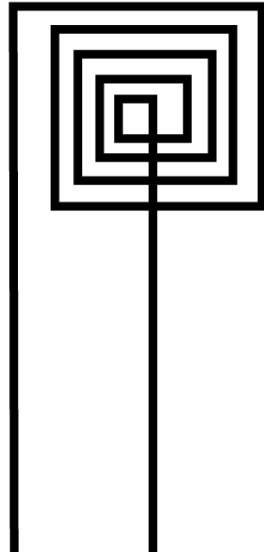


3. *Make a Coil*

Lay the copper tape in the book using the coil you drew as a guide.

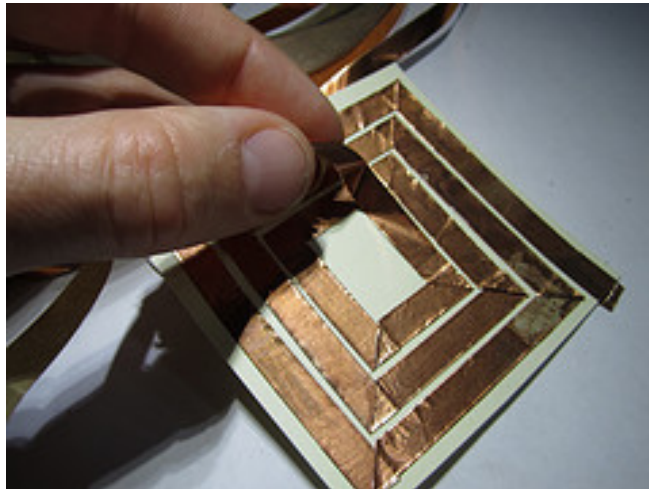


When you are ready to place the last piece of copper tape, put down a strip of masking tape over the copper tape already on the paper.

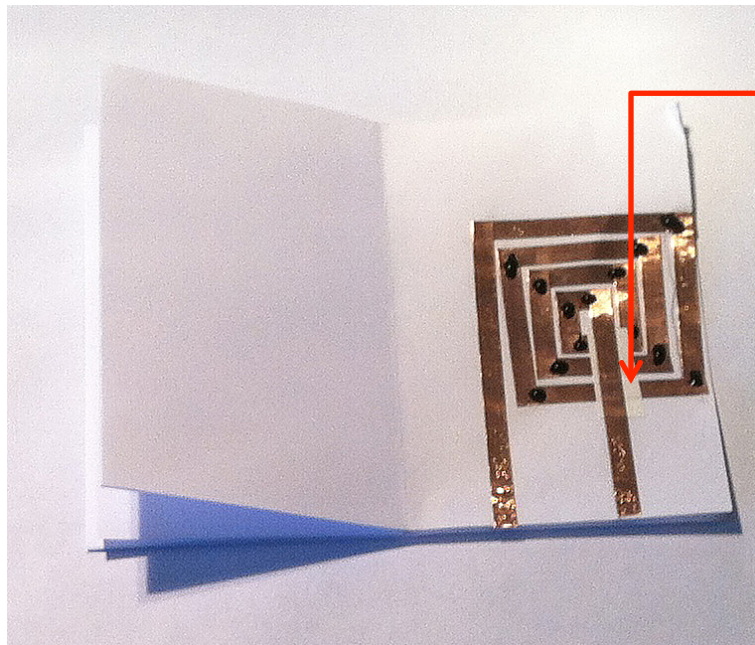


4. *Hook-up the Speaker*

Hook the alligator clip side of the audio cable onto the two ends of the copper tape.

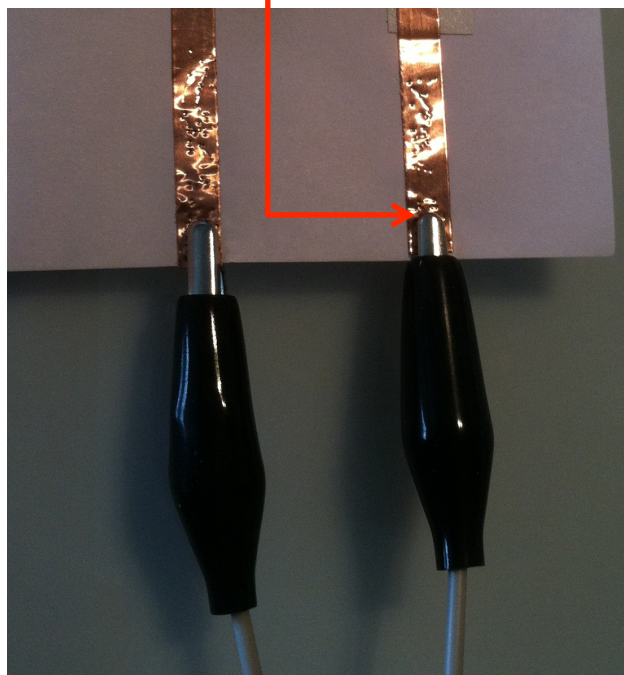

Plug the mini-plug side of the cable into the headphone jack of powered computer speakers.

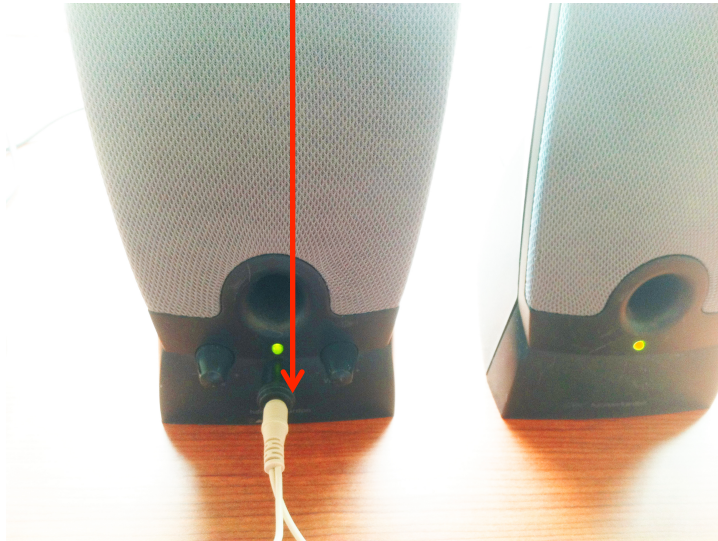

(note: you can still hear sound if you plug it directly to your computer, but for better sound plug into powered computer speakers, or other amplified sound source).

5. *Activate Your Speakers*

Place the magnets over the center of the coil, play some music from your computer, and listen to the magic.

