

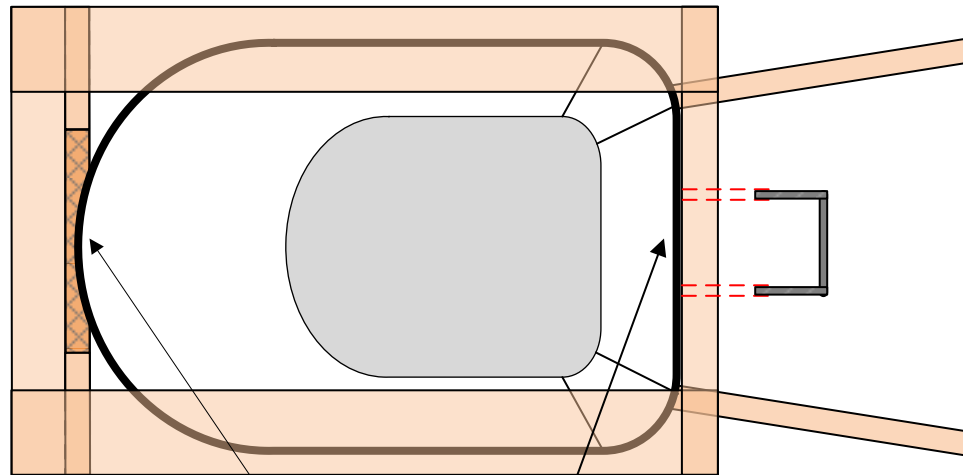


Depth depends on thickness of wheelbarrow lip

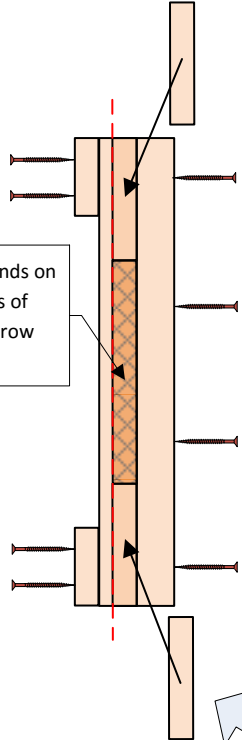


Use shims to restrict lateral movement of the front lip of the wheelbarrow

Lip should overlap by at least 1/2" when wheelbarrow butted up against the handle side of the frame

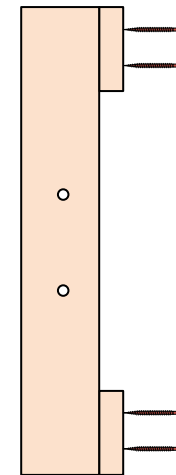

Wheelbarrow Hanger (Wall or Ceiling)				
2 x 4 or 2 x 6 Construction (All joints are Glued & Screwed with drywall screws)				
cdonovan66	SIZE	FSCM NO	DWG NO	REV
	A			1
2016	SCALE	1/8 : 1	SHEET	1 OF 2

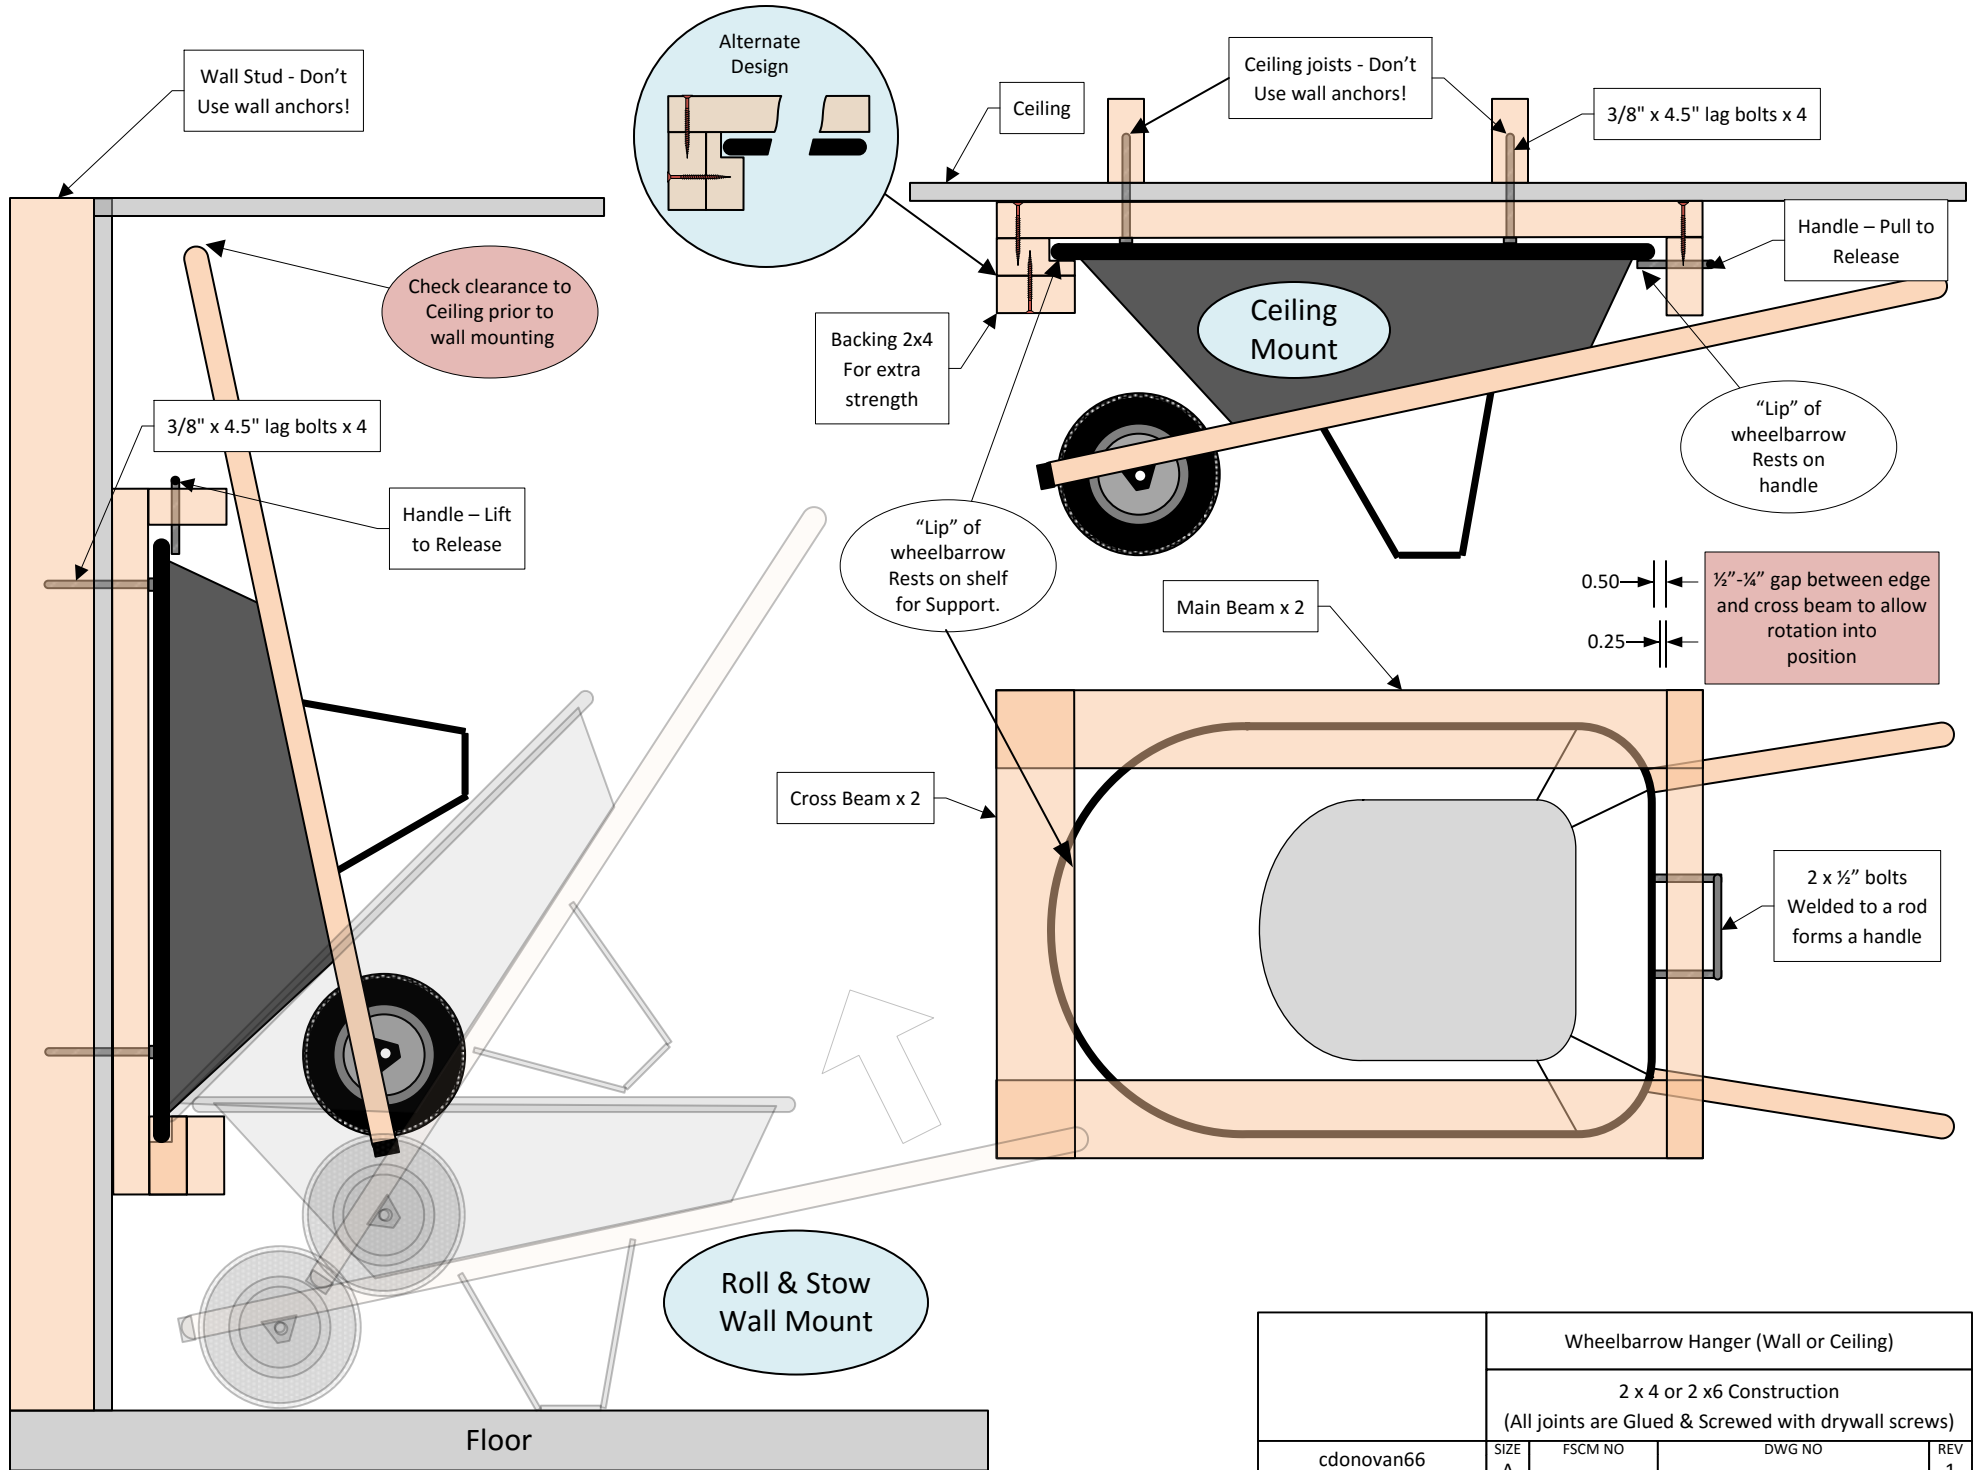

Wheelbarrow Hanger (Wall or Ceiling)				
2 x 4 or 2 x 6 Construction (All joints are Glued & Screwed with drywall screws)				
cdonovan66	SIZE A	FSCM NO	DWG NO	REV 1
2016	SCALE	1/8 : 1	SHEET	2 OF 2